

## FlashStation FS2500



**Brand:** Synology

**Product Code:** FS2500

**Availability:** 10

**Weight:** 8.30kg

**Dimensions:** 44.00mm x 481.90mm x  
555.90mm

**Call for Price:**

### Short Description

Synology 12 Bay FlashStation FS2500 (Diskless)

### Description

**Boost your applications with low-latency storage**



Quad-core AMD<sup>®</sup> Ryzen<sup>™</sup>



## **Throughput**

Up to 172,552/82,917 4K random read/write IOPS



## **Form Factor**

Rackmount 1U



## **Networking**

Built-in dual 10GbE and dual Gigabit Ethernet ports

## **Dependable storage for many scenarios**

Synology NAS is a versatile storage platform that fits perfectly in file server, block storage, or light application server roles that require high availability, reliability, and leading-edge storage technology.

## **Simple and efficient SAN storage**

Choose certified block storage that fits into any environment from day one, with a short learning curve, easy management plugins, free snapshots, and built-in high availability

options.

### **Fast and secure SMB file sharing**

Get great shared file storage that makes permission management a breeze, with powerful RAID options, reliable SMB file serving, efficient backup tools, and easy maintenance.

### **Business application platform**

Host cost-efficient business solutions, including a powerful free backup server, a versatile mail server, lightweight directory server, or surveillance server with transparent licensing.

### **All the connectivity options you need**

Ample built-in and supported networking options ensure that your applications fully benefit from the speed of all-flash arrays and make the FS2500 easy to integrate in any IT

environment.

### **Built-in connectivity**

Leverage fast transfer speeds right out of the box and integrate easily with your existing infrastructure with dual 10GbE and dual 1GbE ports.

### **Support for 25/40GbE**

Enable faster networking with 25 or 40GbE network interface cards, thanks to the PCIe 3.0 expansion slot.

### **Built to boost service continuity**

The FS2500 protects data and services through robust hardware and software safeguards, ensuring access to your digital assets even in the face of disaster.

---


### **Redundancy first**

### **Dual power supply**

Reduce the possibility of power disruptions on a single distribution channel or PDU adversely impacting data and service availability with redundant PSUs.

### **Modular components**

### **Automatic failover**

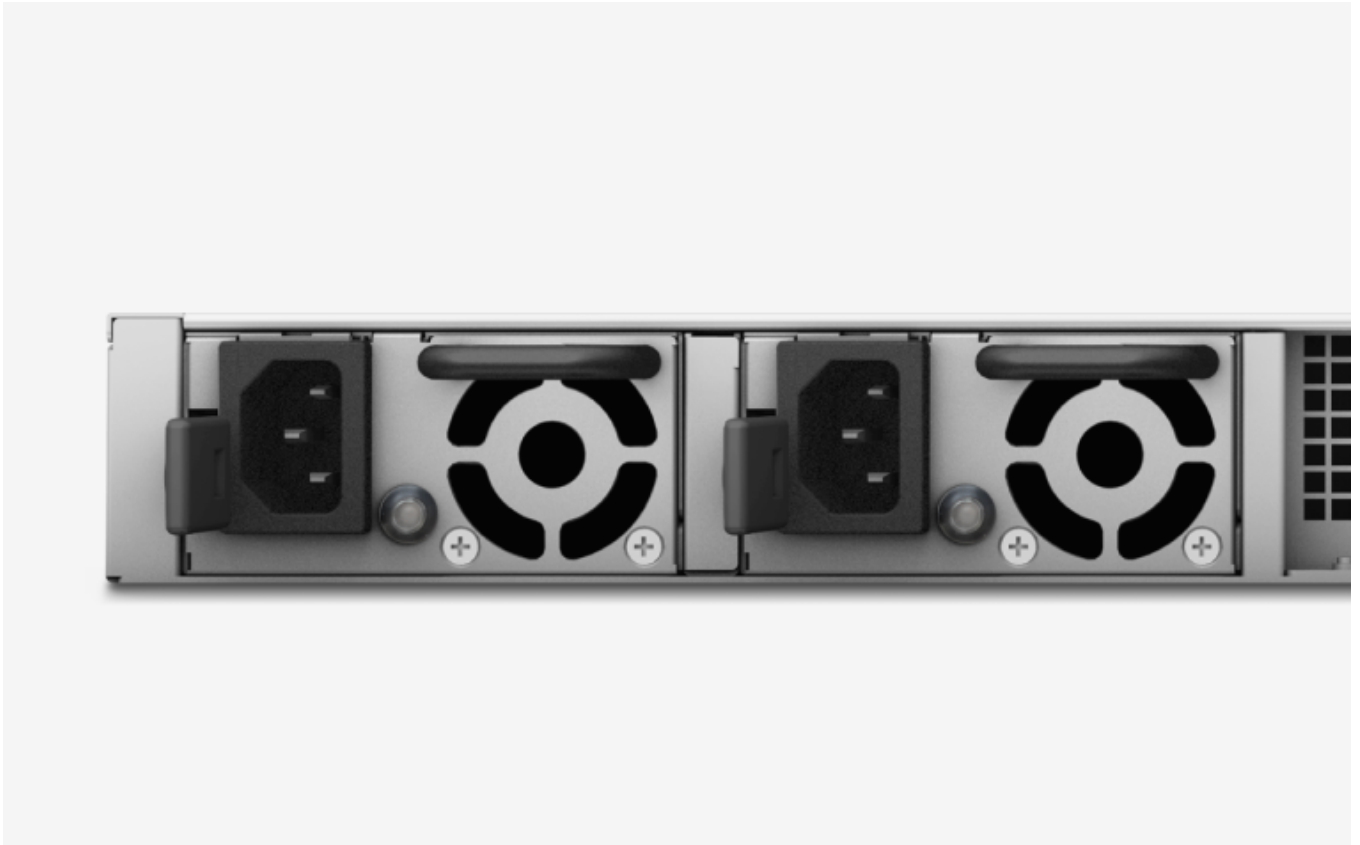

---

## **Availability and protection**

### **Synology High Availability (SHA)**


Enable automatic minute-level failover by pairing up two FS2500 units to create a high-availability cluster, minimizing service downtime in the event of a server failure.

## Snapshot Replication

Create point-in-time snapshots of LUNs and shared folders with an RPO as low as 5 minutes, with support for granular version control.

## Hyper Backup


Back up files, LUNs, applications, and system configurations on your NAS to other Synology NAS, [Synology C2 Storage](#), public cloud platforms, USB devices, file servers, or local folders.

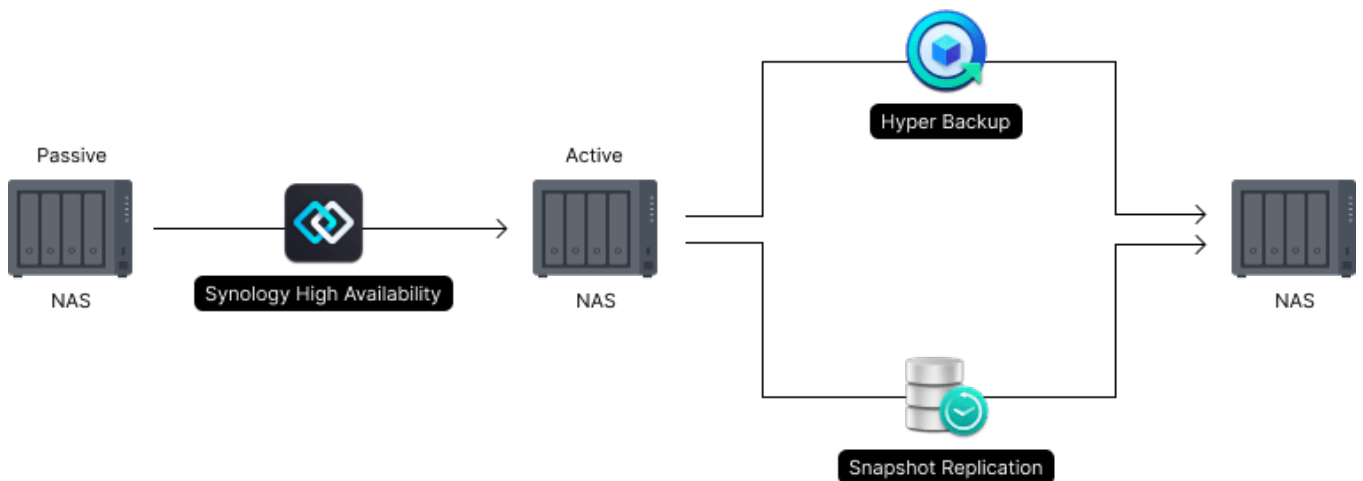

## Flash volume deduplication



Remove duplicate data on all-flash arrays with volume-wide deduplication to greatly increase storage efficiency. Eliminate redundant data to save up to 65% in storage space use in applications like virtual desktop infrastructure, and virtual machine.

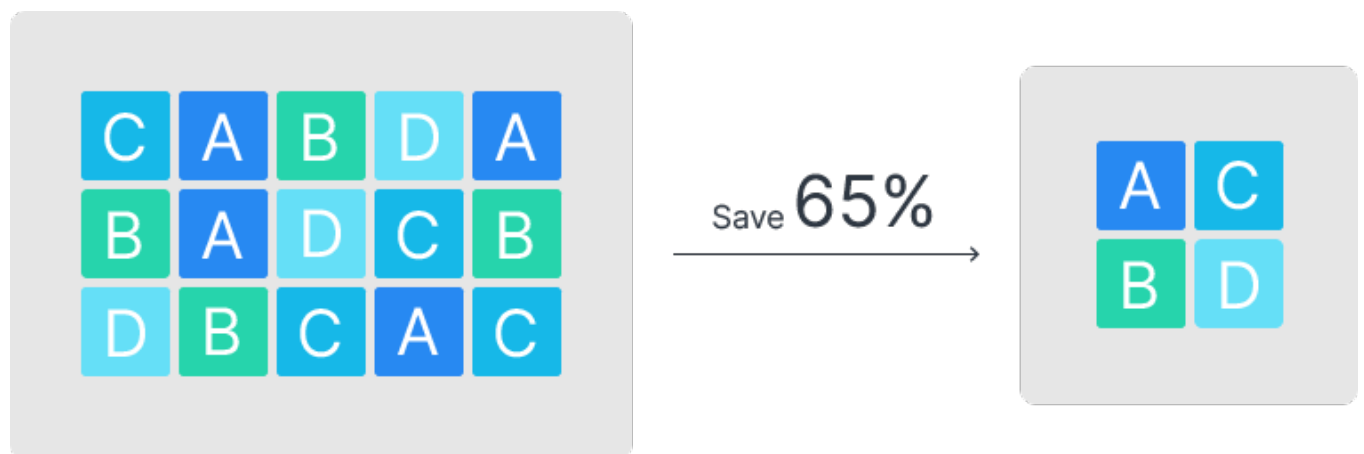

## Complete virtualization platform

Deploy the FS2500 as fast and efficient [VM storage](#) and benefit from free native hosting, management, and protection tools in Synology DiskStation Manager (DSM).

---

## Certified storage for VMs and containers

Deploy and facilitate storage operations in various [virtualization environments](#) with full certification for VMware® vSphere™, Microsoft® Hyper-V®, Citrix® XenServer™, and OpenStack, and a Kubernetes CSI driver for integrated volume management.

VM and container storage on all-flash arrays can benefit from volume-wide data deduplication, a technology that removes identical data to optimize storage use.






---

## **Alternative VM host for testing and recovery**

[Synology Virtual Machine Manager \(VMM\)](#) is a hypervisor for Windows<sup>®</sup> and Linux<sup>®</sup> VMs or Virtual DSM, a virtualized version of DSM. Use your Synology device as an alternative host for VMs to quickly recover services following failure or run failover copies of PCs, servers, and VMs created with Active Backup for Business (ABB), DSM's data protection tool for physical and virtual environments.

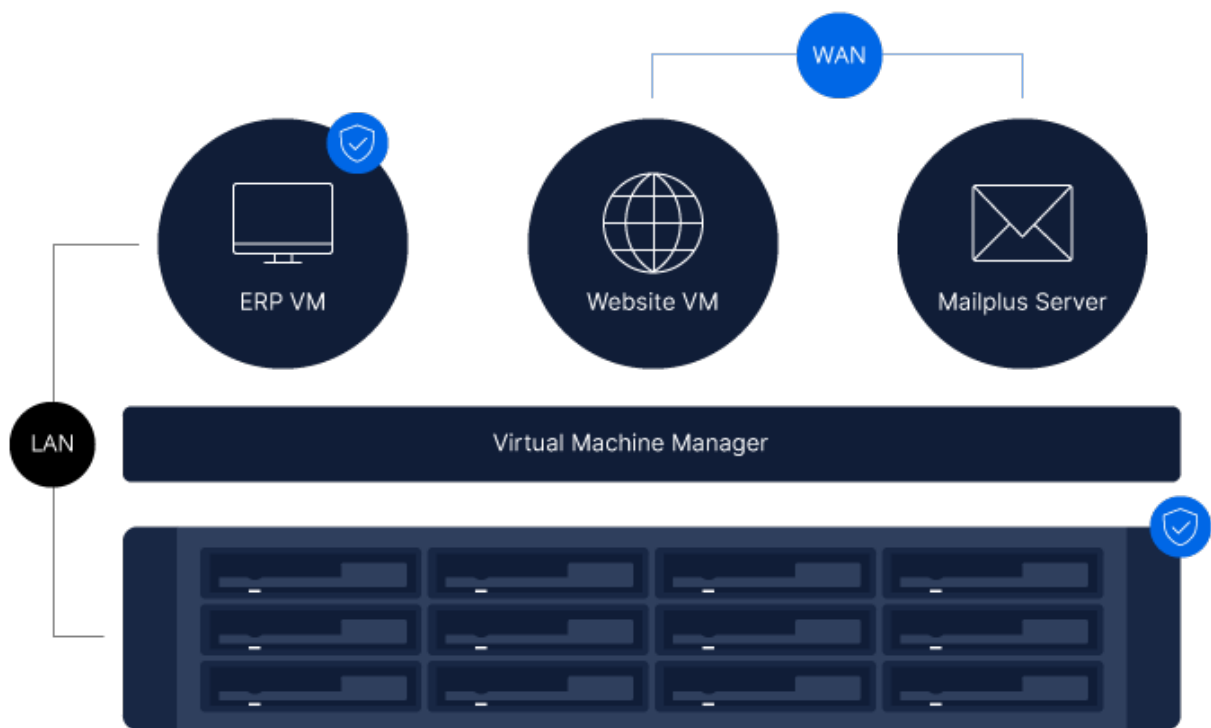

---

**Streamlined configuration and administration**

Manage storage directly from your hypervisor with Synology Storage Console for VMware<sup>®</sup> or Windows platforms, provision volumes directly from the Kubernetes CLI, and offload storage operations and speed up data transfer through VMware<sup>®</sup> VAAI integration and Windows ODX.



### Normal

The connection between VMware vCenter and Storage Console server is normal

#### VMware vCenter

##### Connection settings

IP Address 10.17.26.1  
Username administrator@synology.local  
Password \*\*\*\*\*

[Modify settings](#)

#### Storage Console server

##### Network

Mode DHCP  
IP address 10.17.195.174  
Subnet mask 255.255.240.0  
Gateway 10.17.207.254  
DNS 8.8.8.8

[Modify settings](#)

##### Username & Password

Username root  
Password \*\*\*\*\*

## **Enabling effective collaboration**

Give your teams reliable tools to collaborate and communicate, wherever they are.

### **Synology MailPlus**

Set up a private and secure mail server that can be merged with existing IT infrastructure and platforms.

### **Synology Office**

Collaborate in real time on documents, spreadsheets, and slides for greater synergy and productivity.

### **Synology Drive**

Host your own private cloud on the safety of your NAS with 100% data ownership and no subscription fees.



## **Get more with DiskStation Manager**

Take advantage of a whole host of native productivity, management, and security solutions available on the web-based Synology DSM operating system.

### **Data Protection**

Keep your business safe from data loss and minimize service downtime.

## **User Management**

Manage user accounts and devices throughout your business with powerful directory services.

## **Security**

Shield your Synology NAS from the most sophisticated threats with industry-leading security solutions.

## **File Management**



Manage, sync, and share files from multiple devices through a centralized platform.

### **System Administration**

Manage the health of your deployments and centrally administer updates with ease.

### **Public Cloud Integration**

Back up and synchronize data easily between public cloud accounts and your NAS.



## **Synology has you covered**

The FS2500 is backed by Synology's 5-year limited warranty, including technical support and hardware replacement services to maximize your return on investment and ensure continued high-quality performance.

**Software**  
DSM Specifications

## Storage Management

Maximum Single Volume Size	<ul style="list-style-type: none"><li>• 200 TB (32 GB memory required)</li><li>• 108 TB</li></ul>
Maximum Internal Volume Number	256
SSD Read/Write Cache <a href="#">(Determining cache size)</a>	
SSD TRIM	
RAID Group	
Supported RAID Type	<ul style="list-style-type: none"><li>• RAID F1</li><li>• Basic</li><li>• JBOD</li><li>• RAID 0</li><li>• RAID 1</li><li>• RAID 5</li><li>• RAID 6</li><li>• RAID 10</li></ul>
RAID Migration	<ul style="list-style-type: none"><li>• Basic to RAID 1</li><li>• Basic to RAID 5</li><li>• RAID 1 to RAID 5</li><li>• RAID 5 to RAID 6</li></ul>
Volume Expansion with Larger HDDs	<ul style="list-style-type: none"><li>• RAID F1</li><li>• RAID 1</li><li>• RAID 5</li><li>• RAID 6</li><li>• RAID 10</li></ul>
Volume Expansion by Adding a HDD	<ul style="list-style-type: none"><li>• RAID F1</li><li>• JBOD</li><li>• RAID 5</li><li>• RAID 6</li></ul>
Global Hot Spare Supported RAID Type	<ul style="list-style-type: none"><li>• RAID F1</li><li>• RAID 1</li><li>• RAID 5</li><li>• RAID 6</li><li>• RAID 10</li></ul>
Notes	<ul style="list-style-type: none"><li>• Usable capacity for each volume will be lower than the maximum volume size and is dependent on the filesystem and</li></ul>

## [File System](#)

### Internal Drives

the amount of system metadata stored.

- Volumes over 108 TB require 32 GB of memory or more.

### External Drives

- Btrfs
- ext4
- Btrfs
- ext4
- ext3
- FAT
- NTFS
- HFS+
- exFAT

### Notes

exFAT Access can be installed for free from Package Center in DSM 7.0. In DSM 6.2 or earlier versions, exFAT Access needs to be purchased in Package Center.

## [File Services](#)

### File Protocol

- SMB
- AFP
- NFS
- FTP
- WebDAV
- Rsync

Maximum Concurrent 2,000

SMB/AFP/FTP Connections

Maximum Concurrent 8,000

SMB/AFP/FTP Connections

(with RAM expansion)

Windows Access Control

List (ACL) Integration

NFS Kerberos Authentication

### Notes

- Regarding data concerning tests with RAM expansion, all memory slots are installed with the maximum capacity of supported RAM.

- During testing, the maximum number of SSDs supported by this model is installed in a RAID 5 configuration.
- The testing standard was based on the maximum number of concurrent connections supported by this model. During the testing, 25% of the connections were used to transfer files concurrently. The transfer process guaranteed that the connections were not interrupted; the minimum transfer speed was not guaranteed.

#### [Account & Shared Folder](#)

Maximum Local User Accounts	16,000
Maximum Local Groups	512
Maximum Shared Folder	512
Maximum Shared Folder Sync Tasks	32

#### [Hybrid Share](#)

Maximum Hybrid Share Folders	30
------------------------------	----

#### [Hyper Backup](#)

Folder and Package Backup	
Entire System Backup	
Notes	Full-system backup requires DSM 7.2 or later.

#### [High Availability](#)

#### [Log Center](#)

#### Virtualization

Synology High Availability	
Syslog Events per Second	3,000
VMware ESXi 6.5 and VAAI	
Windows Server 2022	
Citrix Ready	
OpenStack	

#### [General Specifications](#)

Supported Protocols	SMB1 (CIFS), SMB2,
---------------------	--------------------

SMB3, NFSv3, NFSv4, NFSv4.1, NFS Kerberized sessions, iSCSI, HTTP, HTTPs, FTP, SNMP, LDAP, CalDAV

#### Supported Browsers

- Chrome
- Firefox
- Edge
- Safari

#### Supported Language

English, Deutsch, Français, Italiano, Español, Dansk, Norsk, Svenska, Nederlands, ???????, Polski, Magyar, Português do Brasil, Português Europeu, Türkçe, ?eský, ???????, ???, ???, ????, ????

#### Notes

For an updated list of supported browser versions, check the [DSM Technical Specifications](#).

Add-on Packages [view the complete package list](#)  
[Central Management System](#)  
[Synology Chat](#)

#### Suggested Users Notes

300  
Models with expandable memory are tested with their maximum supported memory.

[SAN Manager](#)

#### Maximum iSCSI Target Number

256

#### Maximum LUN LUN Clone/Snapshot, Windows ODX

512

[Synology MailPlus /  
MailPlus Server](#)

#### Free Email Accounts

5 ([Additional accounts  
require purchase of licenses](#))

#### Suggested Users Notes

5,000

- Suggested users is derived from testing in an environment with 20% heavy users (each with 20,000 pre-populated emails and

receiving 240 emails per day) and 80% light users (each receiving an average of 20 emails per day). [Learn more](#)

- The performance of the mail system will slightly decrease in high-availability mode due to data synchronization between the two servers.
- Functions that were enabled in all of the tests above: anti-spam, anti-virus, DNSBL, greylist, content scan, full-text search (English only).
- Models with expandable memory are tested with their maximum supported memory. To estimate the RAM requirement for your NAS, please [read this article](#).

## [Snapshot Replication](#)

Maximum Snapshots per Shared Folder 1,024

Maximum of System Snapshots 65,536

## [Surveillance Station](#)

Default Licenses 2 ([Additional cameras require purchase of licenses](#))

Suggested Maximum IP Cameras and Total FPS (H.264)

- 1080p: 100 channels, 2800 FPS
- 3M: 100 channels, 1200 FPS
- 5M: 70 channels, 700 FPS

Suggested Maximum IP  
Cameras and Total FPS  
(H.265)

Notes

- 4K: 50 channels, 500 FPS
- 1080p: 100 channels, 3000 FPS
- 3M: 100 channels, 2400 FPS
- 5M: 100 channels, 1300 FPS
- 4K: 80 channels, 800 FPS
- Performance figures are obtained from testing conducted with the device fully populated with drives, with their default memory configuration, and under a continuous recording setup. Actual system capabilities may vary based on configuration, drive performance, enabled features, and the presence of additional workloads.
- Use [NVR Selector](#) to quickly find a suitable model based on your requirements.
- The number of streams that can be viewed simultaneously is **twice** the suggested maximum number of cameras. For example, if the suggested maximum number of cameras



for a model is 10 under H.264, 1080p, the model can support up to 20 streams of the same specification at the same time.

## [Synology Drive](#)

Recommended Number of Concurrent Sync Clients

900 (the number of connections that can be maintained when the recommended number of hosted files was reached)

Recommended Number of Hosted Files

50,000,000 (applies to files indexed or hosted by [Synology Drive](#). For file access through other standard protocols, refer to the File Services section above)

Notes

- Exceeding the recommended numbers above will not block application operations, but may result in longer response time.
- Utilizing SSD cache can significantly improve performance.
- Models with expandable memory are tested with their maximum supported memory.
- Btrfs file system and non-encrypted shared folders were used during the aforementioned testing.

## [Synology Office](#)

Suggested Users  
Notes

12,500

- Suggested users is derived from testing in an environment

with 60% idle users (each logging in and viewing documents) and 40% active users (each executing random actions at intervals of 20 to 40 seconds) operating within documents, each document having 30 users. [Learn more](#)

- Models with expandable memory are tested with their maximum supported memory.
- Client performance may affect maximum simultaneous editing users. Client PCs used for testing: Intel Core i3-3220 / 8GB RAM

<a href="#">Virtual Machine Manager</a>	Recommended Virtual Machine Instances	8 ( <a href="#">Learn more</a> )
	Recommended Virtual DSM Number ( <a href="#">Licenses required</a> )	8 (including 1 Free License)
	Notes	The specifications vary depending on system configuration and memory size.
<a href="#">VPN Server</a>	Maximum Connections	60

## Specification

NAS	
CPU Model	AMD Ryzen V1780B
CPU Quantity	1
CPU Core	4
CPU Architecture	64-bit
Hardware Encryption Engine	Yes
Memory	8 GB DDR4 ECC UDIMM
Drive Bays	12

Hot Swappable Drive	Yes
RJ-45 1GbE LAN Port	2
USB 3.2 Gen 1 Port	2
System Fan	40 mm x 40 mm x 4 pcs
Power Supply Unit / Adapter	350 watts
Total Memory Slots	2
Maximum Memory Capacity	32 GB (16 GB x 2)
PCIe Expansion	1 x Gen3 x8 slot (x4 link)
Form Factor (RU)	1U
Redundant Power Supply	Yes
RJ-45 10GbE LAN Port	2

## Product Gallery