TS-832PX



Brand: QNAP

Product Code: TS-832PX

Availability: 10 **Weight:** 7.05kg

Dimensions: 180.20mm x 329.30mm x

280.80mm

Call for Price:

Short Description QNAP 8 Bay NAS TS-832PX-4G

Description

The quad-core 1.7GHz TS-832PX features eight 3.5-inch SATA 6GB/s drive bays, providing huge storage potential for a wide range of applications and everyday usage. With two 10GbE SFP+ and two 2.5GbE LAN ports, the TS-832PX supports next-

with two 10GbE SFP+ and two 2.5GbE LAN ports, the TS-832PX supports next-generation networks for empowering bandwidth-demanding applications and providing smoother file access and sharing. Various PCIe cards are also supported, including QM2 cards that provide M.2 SATA/NVMe SSD caching and QtierTM auto-tiering storage to boost NAS performance.



1

Two 10GbE SFP+ and two 2.5GbE RJ45 network ports empower bandwidth-demanding tasks and accelerate file sharing.

2

PCIe expansion allows for installing a QM2 card to add M.2 SSDs for caching, a 10/5GbE network card, or a wireless network expansion card.

3

Snapshots record your system status, allowing you to protect files and data from accidental deletion and malware attacks.

4

Cloud storage gateways realize hybrid cloud applications by working with the cache space reserved on NAS to ensure low-latency data access to the cloud.

5

 $Qtier^{TM}$ auto-tiering technology and SSD caching enable constant storage optimization.

6

Increase the storage capacity of the TS-832PX with QNAP TR RAID expansion enclosures or TL JBOD.

Available Models

TS-832PX-4G

TS-832PX-4G

AnnapurnaLabs Alpine AL324 ARM® Cortex-A57 4-core 1.7GHz processor, 4 GB SODIMM DDR4(1 x 4 GB)

Energy-efficient Quad-core Processor

Powered by 64-bit quad-core 1.7GHz ARM Cortex-A57 processor and 4 GB DDR4 RAM (expandable to 16 GB), the TS-832PX features is highly energy efficient without impacting system or application performance.

Virtualization Certifications Supported by TS-832PX



Supports AES-128-GMAC for SMB signing acceleration

SMB signing (also known as security signatures) is a security mechanism in the SMB protocol. For business applications that demand high-level security, SMB signing helps enhance file sharing security by protecting against interception attacks. However, SMB signing can also negatively impact data transmission performance. QTS 5.1.0 supports AES-128-GMAC signing acceleration (only in Windows Server 2022 and Windows 11 clients) that not only greatly increases data signing efficiency over SMB 3.1.1 but also enhances the CPU utilization of the NAS system - providing the best balance of security and performance.

x86 64-bit NAS

2X Faster

AES-CMAC: 619 MB/s Read

AES-128-GMAC: 1238 MB/s Read

ARM 64-bit NAS

10X Faster

AES-CMAC: 68 MB/s Read AES-128-GMAC: 738 MB/s Read

Test environment:

Crystal Disk Mark 1MB throughput


Client: Windows Server 2022 (AMD EPYC 7232P 3.0GHz, DDR4 128GB) with 10GbE NICs

x86 NAS: TS-h1887XU-RP-E2336-32G, QTS 5.1.0 (GMAC), QTS 5.0.1 (CMAC), Samsung 870 EVO 1TB, RAID 50, onboard Aquantia X550 10GbE NIC ARM NAS: TS-1232PXU-RP-4G, QTS 5.1.0 (GMAC), QTS 5.0.1 (CMAC), Samsung 860PRO 512GB, RAID 5, onboard Annapurna SFP+ 10GbE NIC

High-speed 10GbE and 2.5GbE connectivity


The TS-832PX includes two 10GbE SFP+ and two 2.5GbE LAN RJ45 ports, providing out-of-the-box support for high-speed networking and supporting Port Trunking and Failover to reinforce your network infrastructure. QNAP also provide many other high-speed networking solutions, including 10GbE/2.5GbE managed/unmanaged switches and

network adapters, allowing you to build a budget-friendly high-speed network environment.

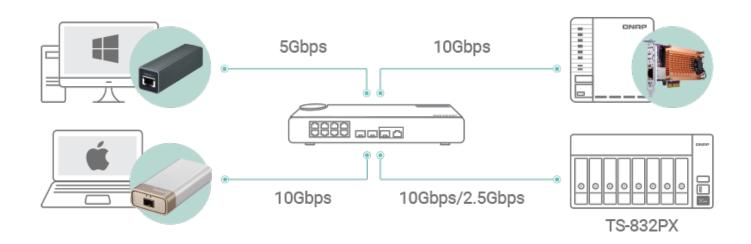


Extend NAS Functionality with a PCIe Card

With a PCIe Gen 2.0 slot, the TS-832PX provides flexibility in extending NAS functionality and potential applications. To optimize system performance, install a QNAP QM2 card for M.2 SATA/NVMe SSD caching/10GbE connectivity and use with Qtier for optimal system performance. You can also use a QNAP Wi-Fi 6 (802.11AX) network card to create a wireless environment. Additional options include QXG 5GbE/2.5GbE network adapter cards and USB 3.2 Gen 2 (10Gbps) cards. All these options ensure that the TS-832PX can be upgraded to fit future requirements.

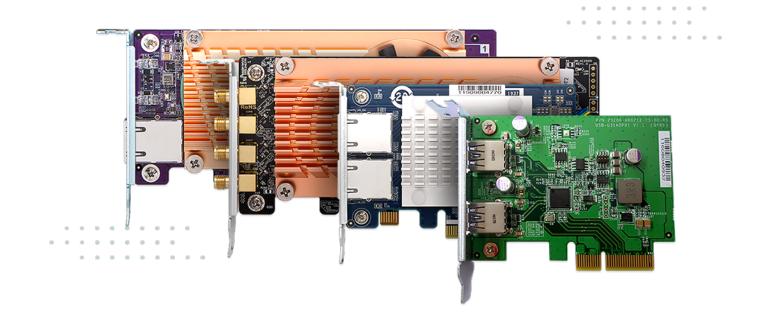


Protect Important Data with Snapshots

Snapshots fully record the NAS system state and metadata and can be used to quickly restore files to previously-recorded states if they are accidentally deleted/modified or if the system is compromised by ransomware. QNAP snapshots are block-based and only record modified data. Not only does this save storage space, but also reduces the time required to back up and restore data. The TS-832PX supports up to 256 snapshots per NAS and up to 64 snapshots per volume or LUN.

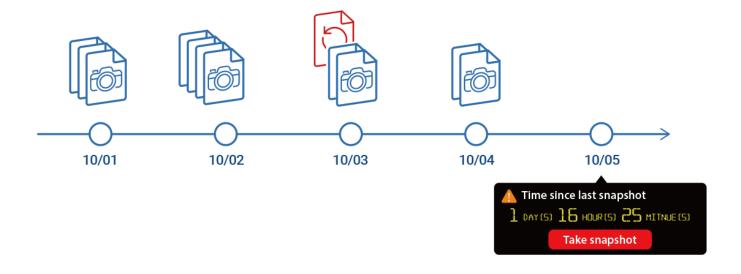

Multi-Point File Backup, Access, and Sync

The TS-832PX supports common file sharing protocols (including SMB/CIFS, AFP and NFS) for Windows®, Mac®, and Linux®/UNIX® devices. Coupled with Qsync (a utility that transforms a QNAP NAS into a secure, high-capacity data center for file synchronization) any file uploaded to the TS-832PX becomes available for all linked devices (such as computers, laptops, and mobile devices). Hybrid Backup Sync helps you easily backup or synchronize data on the TS-832PX to another QNAP NAS, remote server, or cloud storage (including Microsoft One Drive®, Google Drive™, and Dropbox®) for disaster recovery.

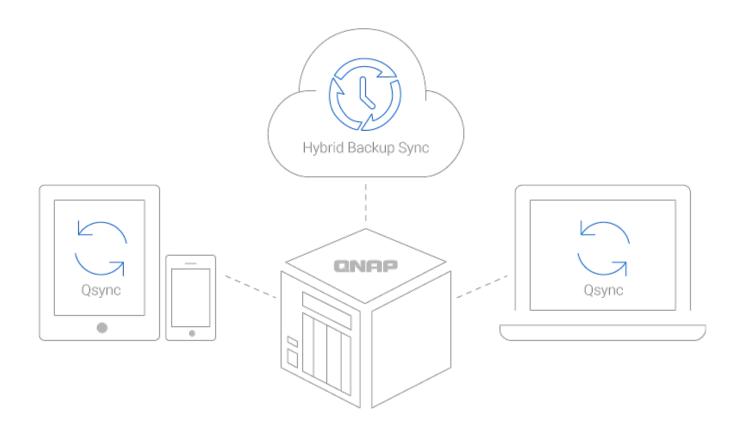

Smart AI Photo Management

QuMagie integrates QuMagie Core AI image recognition technology for facial recognition, subject identification, and geotagging photos. Similar photos are categorized into People, Places, and Things albums. QuMagie also features a built-in timeline scroll, customizable folder covers, iOS® Live Photo display and a powerful search tool, to provide you with the ultimate photo management and image sharing solution.



By deploying cloud storage gateways and enabling local caching on the TS-832PX, you can seamlessly use the cloud for storage, backup, and data recovery with low-latency access, providing an innovative hybrid cloud experience.



HybridMount File-Based Cloud Gateway

Flexibly expand your storage capacity by connecting to cloud storage. You can leverage QTS apps to manage and edit your cloud files or monitor multimedia files. HybridMount is ideal for file server online collaboration and file-level data analysis.



VJBOD Cloud Block-Based Cloud Gateway VJBOD Cloud supports backing up NAS data to block-based cloud storage. Block-based data transmission uploads random data and large files to the cloud in blocks, and only block-based volume or LUN changes are transmitted. This is ideal for backing up LUN, databases, and confidential files.

Easily find and automatically organize files

The TS-832PX provides greater convenience for managing files. You can quickly find files using Qsirch and auto-archive them with Qfiling.



File search

Qsirch quickly finds images, music, videos, documents, emails, and other files by using keywords, colors and different filters.



Auto archiving

Qfiling automates file organization or recycling based on self-configured rules, greatly improving work efficiency.


Secure remote access to your QNAP NAS

Use myQNAPcloud Link to access, share, download, and manage files stored on an HQ-based NAS via the Internet. QNAP NAS also supports VPN services for remote workers to access the NAS and resources on a private network from the Internet. You can also use QVPN Device Client powered by QNAP's proprietary QBelt protocol to easily connect to your TS-832PX and use measurement tools to know the speed of your VPN connections and connection history.




Flexible and economical storage expansion

QNAP provides several ways to expand the storage capacity of the TS-832PX to accommodate data growth:




Upgrade RAID Capacity

Hot-swap lower-capacity drives with larger-capacity drives to expand the TS-832PX.



Attach Expansion Enclosures

Connect two expansion enclosures (4-bay TR-004, 2-bay TR-002) or one 8-bay TL-D800C, 4-bay TL-D400S, 8-bay TL-D800S JBOD and use the Storage & Snapshots Manager to handle NAS capacity expansion.



Migrate to a New NAS

Install your NAS hard drives into a larger QNAP NAS and retain all your existing data and configurations.

Multiply Your Productivity



QVR Pro

Build a secure surveillance environment without any extra software needed. Provides free embedded channels and you can also purchase QVR Pro licenses to deploy a large-scale surveillance network.



Notification Center

Consolidates all QTS system events, alerts, and notifications for easy NAS management, keeping you always informed of your NAS status.



Security Counselor

A security portal for checking weaknesses and providing recommendations for enhancing NAS security. It also integrates anti-virus and anti-malware scanning software.

Software Specs	
Operating System	QTS 5.2.3
Supported Client Operating Systems	1. Apple Mac OS 10.10 or later
	2. Ubuntu 14.04, CentOS 7, RHEL 6.6,
	SUSE 12 or later Linux
	3. IBM AIX 7, Solaris 10 or later
	UNIX
	4. Microsoft Windows 7, 8, 10 and 11
	5. Microsoft Windows Server 2008 R2,
	2012, 2012 R2, 2016, 2019 and 2022
Supported Browsers	1. Apple Safari (latest version)
	2. Google Chrome (latest version)
	3. Microsoft Edge (latest version)
	4. Mozilla Firefox (latest version)
Supported Languages	Chinese (Traditional & Simplified), Czech,
11 8 8	Danish, Dutch, English, Finnish, French,
	German, Greek, Hungarian, Italian,
	Japanese, Korean, Norwegian, Polish,
	Portuguese (Brazil), Romanian, Russian,
	Spanish, Swedish, Thai, and Turkish
Storage Pool	?
SED Storage Pool	· ?
Maximum Pool size	308 TB
Maximum roof size Maximum number of storage pool	128
Volume Type	Thick, Thin, Static
Maximum volume size	250 TB
Waximum voiume size	230 TB
	Note: At least 4 GB RAM is required.
Maximum number of volume	128
Maximum shared folder size	250 TB
Maximum number of shared folder	512
JBOD Expansion	?
VJBOD / VJBOD Cloud	?
iSCSI Service	?
Fibre Channel Service	?
LUN Type	Thick, Thin
File-based iSCSI LUN	?
Block-based iSCSI LUN	?
Maximum LUN size	250 TB

128

Maximum number of targets LUN

Note: At least 4 GB RAM is required.

LUN feature	 LUN Mapping (LUN can be moved between iSCSI and FC) LUN Masking WWPN Aliases Import/Export FC Port Group FC Port Binding Multipath IO (MPIO) Online LUN capacity expansion LUN snapshot LUN snapshot replication and clone
Auto Tiering	?
RAID Type RAID Group	Requires minimum 2GB memory. 1. 8-bay (and more): JBOD, Single, RAID 0, 1, 5, 6, 10, 50, 60 2. 6-bay: JBOD, Single, RAID 0, 1, 5, 6, 10, 50 3. 4-bay: JBOD, Single, RAID 0, 1, 5, 6, 10 4. 2-bay: JBOD, Single, RAID 0, 1 ?
RAID Level Migration RAID Expansion (by adding Disk) RAID Expansion (by replacing bigger Disks) Storage Pool Expansion (by adding RAID	To ensure data security, system stability, and storage performance, the maximum number of drives for a single RAID group is now 16 (applicable to RAID 5, RAID 6, RAID TP, and subgroups of RAID 50 and RAID 60). Nevertheless, users can combine multiple RAID groups into a large storage pool that contains more than 16 drives, using RAID 50, RAID 60, or RAID 10 as the RAID configuration. This enhancement will only be applied to new RAID groups. All existing RAID groups and storage systems will not be affected. ? ? ?
Group) RAID Hot Spare	Global, Local

RAID Sync/Rebuild/Scrubbing Internal drive External drive	? EXT4 EXT3, EXT4, NTFS, FAT32, HFS+, and exFAT (optional for ARM model)
	Note: To use exFat in certain models you
	must purchase an exFAT driver license from
	License Center.
Disk, Enclosure Locate	?
Disk S.M.A.R.T. Scan	?
Disk S.M.A.R.T. Data Migration	?
Ironwolf Health Management	?
Secure Erase	?
SSD Trim	?
SSD Life Estimation	?
Disk Roaming	?
Disk Standby	?
Volume Snapshot	?
LUN Snapshot	?
Maximum Snapshot (Per System)	Check maximum number of snapshots of
	your NAS
Maximum Snapshot (Per Volume / LUN)	Check maximum number of snapshots of
	your NAS
Minimum Snapshot Interval	5 minutes
Snapshot Retention Policy	?
Self-serve Snapshot Recovery	?
Application Consisted Snapshot	?
Snapshot Full Clone	?
Snapshot Replica / Vault	?
SSD read-only Cache	?
SSD read-write cache	?
SSD write-only cache	?
SSD Cache Maximum Size	Check your QNAP NAS cache capacity and
	RAM requirements
SSD Cache RAID	0, 1, 5, 6, 10
SSD profiling tool	?
External Device Management	?
Mount Smart Phone (MTP)	?
External RAID Device (QNAP so on)	?
Management (External Device Mode)	
External RAID Device (QNAP so on)	?
Management (NAS Mode)	

File Server FTP Server	 File sharing across Windows, Mac, and Linux/UNIX Microsoft networking (CIFS/SMB) Apple networking (AFP) NFS version 3/4 services QuFTP FTP, SFTP and TFTP protocols FTP over SSL/TLS (explicit FTPS)
Maximum FTP connection	4. FXP support 1024
	?
File Station (Web)	?
Object Storage Local user account	
	4,096 512
Local group account	
Domain user/group account	200,000 ?
Domain Security Domain Controller	?
Shared folder permission	?
Advanced folder permission	?, (AFP, CIFS/SMB, FTP, and File Station)
Windows ACL	?, (CIFS/SMB)
User quota	?
Group quota	?
Folder quota	?, (Snapshot shared folder)
Home folder	?
Resource Monitor	?
SNMP	V2, V3
Network recycle bin	 Recover files deleted using AFP, CIFS/SMB, and File Station
	Automatic cleanup and file type filter
System Log & Notification Center	Log recording: 3,000 event per second
Smart Fan	?
Schedule on/off	?
Internet protocol	IPv4, IPv6
Virtual Switch	?
Port trunking	? , (7 modes)
VLAN	?
DHCP Server	?
DDNS (Dynamic Domain Name Service)	?
Network access protection with auto-	SSH, Telnet, HTTP(S), FTP, CIFS/SMB,
blocking	and AFP
Security Counselor	?

Malware Remover	?
AES 256-bit Volume Encryption validated	?
by FIPS 140-2 CAVP	
2-step verification	?
Allow/Deny List	?
Access Protection	?
Service binding	?
Firewall	?
Windows Server certificated	?
vSphere Web Client Plug-in	?
VMware vSphere VAAI for iSCSI	?
VMware vSphere VAAI for NAS	?
Windows ODX	?
Windows/VMware Snapshot Agent	?
HTTP/HTTPS Connections	TLS 1.0/1.1/1.2/1.3
Supports WebDAV Connection	?
Supports Virtual Hosts	32
Qsync	?
	Note: At least 1 GB RAM is required.
[Qsync] Management Mode	User customization, Central
[Qsync] Qsync client supported platforms	Windows, macOS, Ubuntu, Android, and
	iOS
[Qsync] Maximum number of version	64
control	
HybridMount	?
	Note: At least 1 GB RAM is required.
[HybridMount] File Cloud Gateway	Concurrent Connections = 20 Upload & 20
	Download
[HybridMount] Network Drive Mount	?
[HybridMount] Free cloud gateway sessions	s 2
HBS (Hybrid Backup Sync)	?
	Note: At least 1 GB RAM is required.
[HBS (Hybrid Backup Sync)] NAS to NAS	?
backup	
[HBS (Hybrid Backup Sync)] Cloud Backup	
[HBS (Hybrid Backup Sync)] Cloud Sync	?
[HBS (Hybrid Backup Sync)] 2-way and	?
Active Sync	
[HBS (Hybrid Backup Sync)] Apple Time	?

Machine Backup [HBS (Hybrid Backup Sync)] External drive backup [HBS (Hybrid Backup Sync)] Maximum number of backup job Boxafe	e ? 400 ?
[Boxafe] Office 365 Backup [Boxafe] Google Workspace Backup [Boxafe] Full-text search Qsirch	Note: At least 4 GB RAM is required. ? ? ? ? ?
[Qsirch] Previews	Note: This feature is supported by all QNAP NAS devices with at least 2 GB of memory Photos, music, videos, PDFs, Gmail, and
[Qonen] Heviews	others
[Qsirch] Integrate Mac Finder	?
[Qsirch] Advanced picture search	?
[Qsirch] Search filters	?
QuMagie	?
	Note: At least 1 GB RAM is required.
[QuMagie] Browse photos	?
[QuMagie] Virtual and smart albums	· ?
[QuMagie] AI-assisted photo management	People, things, places, and others
Antivirus (free)	?
QVPN Service	? ?
	?
QVPN Service	? Note: At least 1 GB RAM is required.
	? Note: At least 1 GB RAM is required. PPTP, L2TP/IPSec, OpenVPN, QBelt
QVPN Service [QVPN Service] Remote Access	? Note: At least 1 GB RAM is required. PPTP, L2TP/IPSec, OpenVPN, QBelt (QNAP proprietary)
QVPN Service [QVPN Service] Remote Access [QVPN Service] Supportedd utility and	? Note: At least 1 GB RAM is required. PPTP, L2TP/IPSec, OpenVPN, QBelt
QVPN Service [QVPN Service] Remote Access [QVPN Service] Supportedd utility and mobile app	? Note: At least 1 GB RAM is required. PPTP, L2TP/IPSec, OpenVPN, QBelt (QNAP proprietary) Windows, macOS, iOS, and Android
QVPN Service] Remote Access [QVPN Service] Supported utility and mobile app [QVPN Service] Supported maximum	? Note: At least 1 GB RAM is required. PPTP, L2TP/IPSec, OpenVPN, QBelt (QNAP proprietary)
QVPN Service] Remote Access [QVPN Service] Supported utility and mobile app [QVPN Service] Supported maximum clients	? Note: At least 1 GB RAM is required. PPTP, L2TP/IPSec, OpenVPN, QBelt (QNAP proprietary) Windows, macOS, iOS, and Android 100
[QVPN Service] Remote Access [QVPN Service] Supported utility and mobile app [QVPN Service] Supported maximum clients LDAP Server	? Note: At least 1 GB RAM is required. PPTP, L2TP/IPSec, OpenVPN, QBelt (QNAP proprietary) Windows, macOS, iOS, and Android 100 ?
QVPN Service] Remote Access [QVPN Service] Supported utility and mobile app [QVPN Service] Supported maximum clients	? Note: At least 1 GB RAM is required. PPTP, L2TP/IPSec, OpenVPN, QBelt (QNAP proprietary) Windows, macOS, iOS, and Android 100
[QVPN Service] Remote Access [QVPN Service] Supported utility and mobile app [QVPN Service] Supported maximum clients LDAP Server RADIUS	? Note: At least 1 GB RAM is required. PPTP, L2TP/IPSec, OpenVPN, QBelt (QNAP proprietary) Windows, macOS, iOS, and Android 100 ? ? ?
[QVPN Service] Remote Access [QVPN Service] Supported utility and mobile app [QVPN Service] Supported maximum clients LDAP Server RADIUS SQL server	? Note: At least 1 GB RAM is required. PPTP, L2TP/IPSec, OpenVPN, QBelt (QNAP proprietary) Windows, macOS, iOS, and Android 100 ? ? ? ? ?

Music Station	?
Video Station	?
Download Station	?
Notes Station	?
Qfiling	?
Media Streaming add-on	?
QmailAgent	?
QuWAN	?
DA Driver Analyzer	?
Q'center	?
	Note: The application is available in the App
	Center and in virtual appliance marketplaces
	(VMware vSphere ESXi and Microsoft
	Hyper-V).
Q'center Server	?
Q'center Agent	?
Connect to Q'center	?
Container Station	?
	Note: At least 1 GB RAM is required.
[Container Station] Supported type	LXC/LXD and Docker
[Container Station] Supported type	LAC/LAD and Docker
[Container Station] Supported type	Note: LXD has been supported after
[Container Station] Supported type	
[Container Station] Docker Hub Registry	Note: LXD has been supported after
[Container Station] Docker Hub Registry [Container Station] Container importing and	Note: LXD has been supported after Container Station 2.4
[Container Station] Docker Hub Registry [Container Station] Container importing and exporting	Note: LXD has been supported after Container Station 2.4 ?
[Container Station] Docker Hub Registry [Container Station] Container importing and	Note: LXD has been supported after Container Station 2.4
[Container Station] Docker Hub Registry [Container Station] Container importing and exporting [Container Station] Console mode	Note: LXD has been supported after Container Station 2.4 ? ? ? ?
[Container Station] Docker Hub Registry [Container Station] Container importing and exporting [Container Station] Console mode	Note: LXD has been supported after Container Station 2.4 ? ? ? ? Note: At least 4 GB RAM is required. The
[Container Station] Docker Hub Registry [Container Station] Container importing and exporting [Container Station] Console mode	Note: LXD has been supported after Container Station 2.4 ? ? ? ? Note: At least 4 GB RAM is required. The maximum number of channels supported
[Container Station] Docker Hub Registry [Container Station] Container importing and exporting [Container Station] Console mode	Note: LXD has been supported after Container Station 2.4 ? ? ? Note: At least 4 GB RAM is required. The maximum number of channels supported varies by NAS model, network
[Container Station] Docker Hub Registry [Container Station] Container importing and exporting [Container Station] Console mode	Note: LXD has been supported after Container Station 2.4 ? ? ? Note: At least 4 GB RAM is required. The maximum number of channels supported varies by NAS model, network configuration, and camera settings. For more
[Container Station] Docker Hub Registry [Container Station] Container importing and exporting [Container Station] Console mode	Note: LXD has been supported after Container Station 2.4 ? ? ? Note: At least 4 GB RAM is required. The maximum number of channels supported varies by NAS model, network configuration, and camera settings. For more information,
[Container Station] Docker Hub Registry [Container Station] Container importing and exporting [Container Station] Console mode	Note: LXD has been supported after Container Station 2.4 ? ? ? Note: At least 4 GB RAM is required. The maximum number of channels supported varies by NAS model, network configuration, and camera settings. For more information, visit https://www.qnap.com/go/qvr-nas-
[Container Station] Docker Hub Registry [Container Station] Container importing and exporting [Container Station] Console mode QVR Pro	Note: LXD has been supported after Container Station 2.4 ? ? ? ? Note: At least 4 GB RAM is required. The maximum number of channels supported varies by NAS model, network configuration, and camera settings. For more information, visit https://www.qnap.com/go/qvr-nas-selector .
[Container Station] Docker Hub Registry [Container Station] Container importing and exporting [Container Station] Console mode QVR Pro [QVR Pro] Recording Technique	Note: LXD has been supported after Container Station 2.4 ? ? ? Note: At least 4 GB RAM is required. The maximum number of channels supported varies by NAS model, network configuration, and camera settings. For more information, visit https://www.qnap.com/go/qvr-nas-selector . Index database based
[Container Station] Docker Hub Registry [Container Station] Container importing and exporting [Container Station] Console mode QVR Pro [QVR Pro] Recording Technique [QVR Pro] License Type	Note: LXD has been supported after Container Station 2.4 ? ? ? Note: At least 4 GB RAM is required. The maximum number of channels supported varies by NAS model, network configuration, and camera settings. For more information, visit https://www.qnap.com/go/qvr-nas-selector . Index database based Perpetual
[Container Station] Docker Hub Registry [Container Station] Container importing and exporting [Container Station] Console mode QVR Pro [QVR Pro] Recording Technique	Note: LXD has been supported after Container Station 2.4 ? ? ? Note: At least 4 GB RAM is required. The maximum number of channels supported varies by NAS model, network configuration, and camera settings. For more information, visit https://www.qnap.com/go/qvr-nas-selector . Index database based

[QVR Pro] QVR Pro Client (Desktop)	Windows, macOS, and QNAP HybridDesk
	Station
[QVR Pro] QVR Pro Client (Mobile)	Android and iOS
[QVR Pro] Recording camera streams	H.264
[QVR Pro] Free built-in camera channels	8
QVR Elite	?

Note: At least 1 GB RAM is required. The maximum number of channels supported varies by NAS model, network configuration, and camera settings. For more information,

visit https://www.qnap.com/go/qvr-nas-selector.

	<u>sciector</u> .
[QVR Elite] Recording Technique	Standard MP4 file based
[QVR Elite] License Type	Subscription-based
[QVR Elite] User-defined trigger events	?
[QVR Elite] QVR Pro Client (Desktop)	Windows, macOS, and QNAP HybridDesk
	Station
[QVR Elite] QVR Pro Client (Mobile)	Android and iOS
[QVR Elite] Recording camera streams	H.264
[QVR Elite] Free built-in camera channels	2
QVR Pro Client	?
[QVR Pro Client] Dynamic View Layout	?
[QVR Pro Client] Windows	?
[QVR Pro Client] Mac	?
[QVR Pro Client] HybridDesktop	?
[QVR Pro Client] iOS	?

Specification

[QVR Pro Client] Android

~ P • • • • • • • • • • • • • • • • • •	
NAS	
CPU Model	AnnapurnaLabs Alpine AL324 ARM® Cortex-
	A57 4-core 1.7GHz processor
CPU Architecture	64-bit ARM
Hardware Encryption	?
Engine	
Memory	4 GB SODIMM DDR4(1 x 4 GB)
Drive Bays	8
Compatible Drive Type	3.5-inch bays: 3.5-inch SATA hard disk drives
	2.5-inch SATA hard disk drives 2.5-inch SATA

	solid state drives
Hot Swappable Drive	? (Not supported M.2 SSD)
USB 3.2 Gen 1 Port	3
System Fan	System fan: 2 x 120mm, 12VDC CPU fan: 1 x 60mm
Power Supply Unit / Adapter	250W, 100-240V AC, 50/60Hz, 3.5A
Total Memory Slots	1 x SODIMM DDR4
Maximum Memory Capacity	16 GB (1 x 16 GB)
M.2 Drive Slots	Optional via a PCIe adapter
PCIe Expansion	1 Slot 1: PCIe Gen 2 x2 PCIe bandwidth
_	limitations will restrict the NAS 10GbE
	performance. Card dimensions for PCIe slot?210 x 68.9x 24.76 mm / 8.27 x 2.71 x 0.97 inches.
Form Factor (RU)	Tower
Floating Point Unit	?
Flash Memory	512 MB (Dual boot OS protection)
SSD Cache Acceleration Support	?
Wake on LAN (WOL)	? Only the 2.5GbE port
Jumbo Frame	?
LED Indicators	System Status, LAN, USB, HDD1~8
Buttons	Power, Reset, USB Copy
Operating Temperature	0 - 40 °C (32°F - 104°F)
Storage Temperature	-20 - 70°C (-4°F - 158°F)
Relative Humidity	5-95% RH non-condensing, wet bulb: 27?C (80.6?F)
Power Consumption: Disk	27.949
Standby Mode	
System Warning	Voice prompts or Buzzer
Max. Number of	700
Concurrent Connections	
(CIFS) - with Max.	
Memory	
Kensington Security Slot	?

Product Gallery









